



AL WATHIQ
TRADING

MEP SUPPLIER

MEP
GENERAL
CATALOGUE

www.alwathiqtrading.com

admin@alwathiqtrading.com

ABOUT

Alwathiq Group empowers Qatar's construction sector as a trusted MEP supplier and distributor of essential building materials. We are dedicated to equipping industry professionals with leading-edge products and value-driven supply solutions that optimize performance from ground-breaking to handover.

Excellence is our baseline. We operate with an unwavering commitment to the MEP and civil construction markets, acting as a responsive, customer-first partner. By building strong, direct relationships with project teams, we ensure seamless material availability that consistently surpasses expectations.

Rooted in our core pillars of commitment, innovation, and reliability, we foster deep trust in every partnership. These values define our operations and strengthen our bonds with stakeholders, ensuring Alwathiq Group remains synonymous with quality supply.



TABLE OF CONTENT

No	Contents	Pages
1	Pipe Tools	1-5
2	HDPE Welding Machines	6-8
3	Welding Machine Accessories	9-10
4	Cable Tools	11-15
5	Lifting Tools	16-19
6	Safety	20-24
7	Power Tools	25-28
8	Hand Tools	29-32
9	Ladder	33-38
10	Test & Measurement	39-42
11	Other Mep Tools & Machineries	43-49
12	Cable Laying Equipments	50-55
13	Mep Consumables	56-62



PIPE TOOLS



SOCKET FUSION TOOL KITS



- Socket welders for PPR piping systems.
- Welding ranges from 20mm to 160mm.
- Portable socket fusion machine for PPR piping systems.
- Intelligent electronic temperature control.
- Sockets with premium quality Teflon coating.
- Features digital display screen.

HEATING PLATES



Series of manual instruments equipped with an aluminum heating plate Teflon-coated (PTFE) and a practical heat insulated plastic handle.



PIPE BENDER

Supplied with formers for bending 20mm, 25mm, and 32mm conduit.



MANUAL STOCK & DIET SET

A manual stock and die set is a handheld tool kit used to cut new external threads (threading) or repair damaged threads on rods, bolts, and pipes. These sets feature hardened steel dies for durability, with adjustable holders (stocks) for precise, low-to-medium hardness metalworking.



BENCH YOKE VISE

Yoke and base made of strong, dependable iron. Hardend alloysteel jaws and convenient pipe rest and bender. Portable yoke vise easily attaches to plank,workbench or post.

TECHNICAL SPECIFICATIONS

Pipe Capacity (inches): 1/8" - 2"
Pipe Capacity (mm): 3-50 mm
Weight : 4 Kg

Pipe Capacity (inches): 1/8" - 3"
Pipe Capacity (mm): 3-50 mm
Weight : 4 Kg

Pipe Capacity (inches): 1/8" - 4"
Pipe Capacity (mm): 3-100 mm
Weight : 4 Kg



FOLDABLE STEEL PIPE STAND

The heavy-duty adjustable pipe stands are available in varying configurations with capacity from 1/8"-12"(3 mm - 300 mm); suitable for use with threading machine,pipe roll groovers, etc.

TECHNICAL SPECIFICATIONS

Type	:	Ball Transfer Head
Max Weight Capacity	:	1000 Lb
Max Pipe Capacity (inch)	:	12 inch
Max Pipe Capacity (mm)	:	300 mm
Weight	:	2.8 kg



CHAIN PIPE VISE 1/8" - 6"

Heavy duty cast Iron body. Bench vise has a 1/8-inch to 6-inch (3 mm to 150 mm) pipe capacity. Rugged, cast-iron base features a convenient pipe rest and bender. 1/2" Pipe bending shoes. Crank handle is anchored to the base of the bench vise.

TECHNICAL SPECIFICATIONS

Vise Material	:	Ductile Cast Iron 1000 Lb
Torque Force Capacity	:	420 Nm
Pipe Capacity (inch)	:	1/8-6 inch
Pipe Capacity (mm)	:	3-150 mm
Weight	:	7 kg

PIPE TRI-STAND CHAIN VISE 1/8" - 6"

Include intergral legs and tray fold in for easy carring and setup. Large vise base overhangs front legs for clear tool swing. Casting Aluminum base, lightweight but strong enough. Include slots for hanging tools, pipe rest, three-pipe benders, and ceiling brace screw. Crank handle is anchored to base. Features a larger work surface.



Vise Material	:	Ductile Cast Iron
Torque Force Capacity	:	420 Nm
Max Weight Capacity	:	1000 Lb
Pipe Capacity (inch)	:	1/8-6 inch
Pipe Capacity (mm)	:	3-150 mm
Weight	:	20 kg



**HDPE PIPE
WELDING
MACHINES**



BUTT FUSION WELDING MACHINE

Welding machine ranges from 40mm to 2000mm



ELECTRO FUSION WELDING MACHINE

Welding machine ranges from 20mm to 1600mm



EXTRUSION WELDING

Extrusion welding is a high-strength thermoplastic joining method used for thick materials like HDPE or PP. It uses a hot-air preheat to melt base materials, while simultaneously applying molten filler rod via an extruder, creating continuous, leak-free, high-volume welds in one pass. Common in tank, pipe, and geomembrane fabrication, this technique relies on operator skill.

HOT AIR GUN





WELDING MACHINE ACCESSORIES



WELDING ELECTRODES



MIG/MAG



FLUX CORED WIRE



TIG FILLER



WELDING TOOLS AND ACCESSORIES





CABLE TOOLS

CABLE CRIMPING TOOLS



Tools for Lugs & Connetor Crimping:

- Pistol cordless hydraulic crimpers
- Hand crimpers
- Manual hydraulic crimpers
- Hexagon crimping, indent crimping,
- Remote hydraulic crimpers
- Die-Less Crimping.



CABLE CUTTING TOOLS



Tools for Cables & Wires cutting

- Pistol cordless hydraulic cutters
- Hand cable cutters
- Manual hydraulic cutters
- Remote hydraulic cutters
- Copper cables, aluminum cables, ACSRs, steel rods, wire ropes, soft rebars.



PUNCHING TOOLS



Punching tools for Metal plates:


- Manual knockout punch set
- Manual hydraulic puncher
- Remote hydraulic puncher



HYDRAULIC FOOT PUMP

- Hydraulic foot pumps for remote tools and heads, from small heads to big output heads. Set your hands free to control your cylinder or tool with this high-pressure foot pump. The steel lever pedal and a foot operated release valve also help to protect your posture by eliminating the need to bend over to operate the pump.

Compared to a single speed type, this 2-speed pump can reduce pedal strokes by as much as 78%. This feature delivers high flow at the first stage - such as when advancing a cylinder to the point of load contact. As it reaches this point, the pump automatically switches to the low flow high-pressure stage.

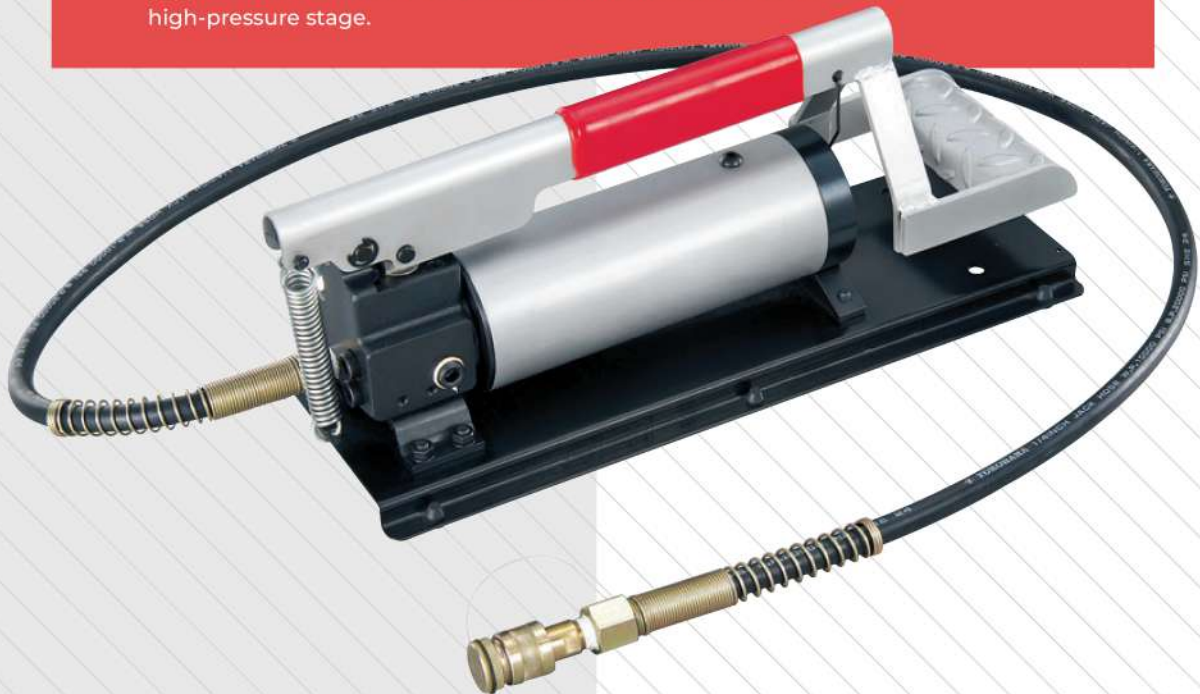



LIFTING TOOLS



MATERIAL LIFT

a versatile, fast, and relatively easy-to-learn arc welding process. It uses a continuously fed, consumable solid wire electrode and a shielding gas to join metal parts. Ideal for both thin and thick materials, it is widely used for fabrication due to its high productivity and clean welds

TECHNICAL SPECIFICATIONS

Lifting Height	Lifting Height	Retracted Height	Weight
7.52 Meter	300 Kg	2,20 Meter	188 Kg

Product Information

- Dutch-quality product
- Full assembly without tools
- Standard silent winch with double levers
- Large locking casters on the backside increase ease of movement with heavy load
- Patented lock system prevents uncontrolled or premature extension of the mast sections
- Reinforced bearings in the pulleys
- Unique cable management system in the mast section reduces wear and tear of the mast elements and the steel cable
- Convenient transport dimensions, also for standard doorways
- CE marking



PALLET TRUCK

HYDRAULIC HAND PALLET TRUCK

Hydraulic hand pallet trucks are essential, manual material handling tools designed for lifting and transporting palletized loads, typically with capacities between 2 and 3 tons and fork heights up to 200 mm. Featuring durable steel construction manual hydraulic pump handles, they provide an efficient, cost-effective, and safe way to maneuver heavy items in warehouses, logistics centers, and retail environments.

Product Information

- Most standard and popular model with capacity 3000 and 5000kg.
- Material: 4mm alloy steel plate makes strength 6 times higher than mild steel material.
- Wheels: PU wheel is heavy with little noise, more applicable for indoor use with smooth ground. Nylon wheel is more applicable for rough ground of outdoor.
- One piece pump design provides oil leak-proof and eliminate maintenance and extend the service time.
- 130mm hand grip size with ergonomic rubber wrap is more strong and comfortable for easy operation.
- Shaft and pin connection is much easier for installation or replace of the handle.
- Reinforced rib design under the supporting frame provide higher strength.
- 3 position hand control - Raise, Lower, Neutral
- Adjustable pump cap ensure a long service life.



CHAIN BLOCK

Available Capacity:
1T, 2T, 3T, 5T

A chain block (or chain hoist) is a portable, manual device used to lift and lower heavy loads (up to 50 tonnes) through a gear-driven pulley system. It features a hand chain and a load chain, allowing operators to lift heavy items with minimal effort, making it essential for construction, workshops, and warehouses



LEVER BLOCK

Available Capacity:
1.5T, 3T

A lever block, also known as a come along, is a manual lifting device used to raise, lower, or pull heavy loads using mechanical advantage. It operates by applying force to a lever, which in turn moves a chain or wire rope to lift the load.



SAFETY



SAFETY HARNESS

Fall Arrest

- 1 fall arrest Dorsal D-ring
- 5-point adjustable pass through buckles
- Pass-through leg strap
- 2 color webbing for easy to wear
- MBL: 22kN
- EN 361



Shock Absorbing Double Webbing Lanyard

- 100% High Tenacity
- Length: 1.6 Mtrs
- MBL: 22kN
- EN354

Carabiner or Scaffolding Hook



Energy Absorber

- 100% High Tenacity
- Length: 1.6 Mtrs
- MBL: 22kN
- EN354



Rescue Tripod w/Winch

Type	Rescue The Tripe Tripod	Material	Aluminum
Workload	200KG	Wire rope	30M
Blocking force	22KN	Gear ratio	5:01
Extension length	222cm	Breaking load	500kg
Closed Length	44cm	Packing size	145*40*40cm
Maxlifting weight	600N	Quality	<30KG



Retractable Fall Arrester

Product Code	: TRA-FA20M
Length	: 20 Mtrs
Polymer Casing	: High Strength Polymer Casing provides maximum durability
Galvanized Steel Eye	: Yes
Steel Swivel Hook	: Yes
Capacity	: 100 kg
Standards	: EN360:2002

GLOVES



DRIVING GLOVES



LEATHER WORKING



RUBBER COATED



DOTTED GLOVES



RUBBER GLOVES



LEATHER WELDING



DISPOSABLE GLOVES



KNITTED GLOVES



SAFETY JACKETS



SAFETY EARMUFFS



SAFETY EARPLUGS



SAFETY HELMETS



POWER TOOLS

12V CORDLESS



18V CORDLESS



54V CORDLESS



DRILLS & FASTENERS



ROTARY HAMMERS




DEMOLITION HAMMERS



GRINDERS




WOOD WORKING TOOLS



DUST MANAGERMENTS



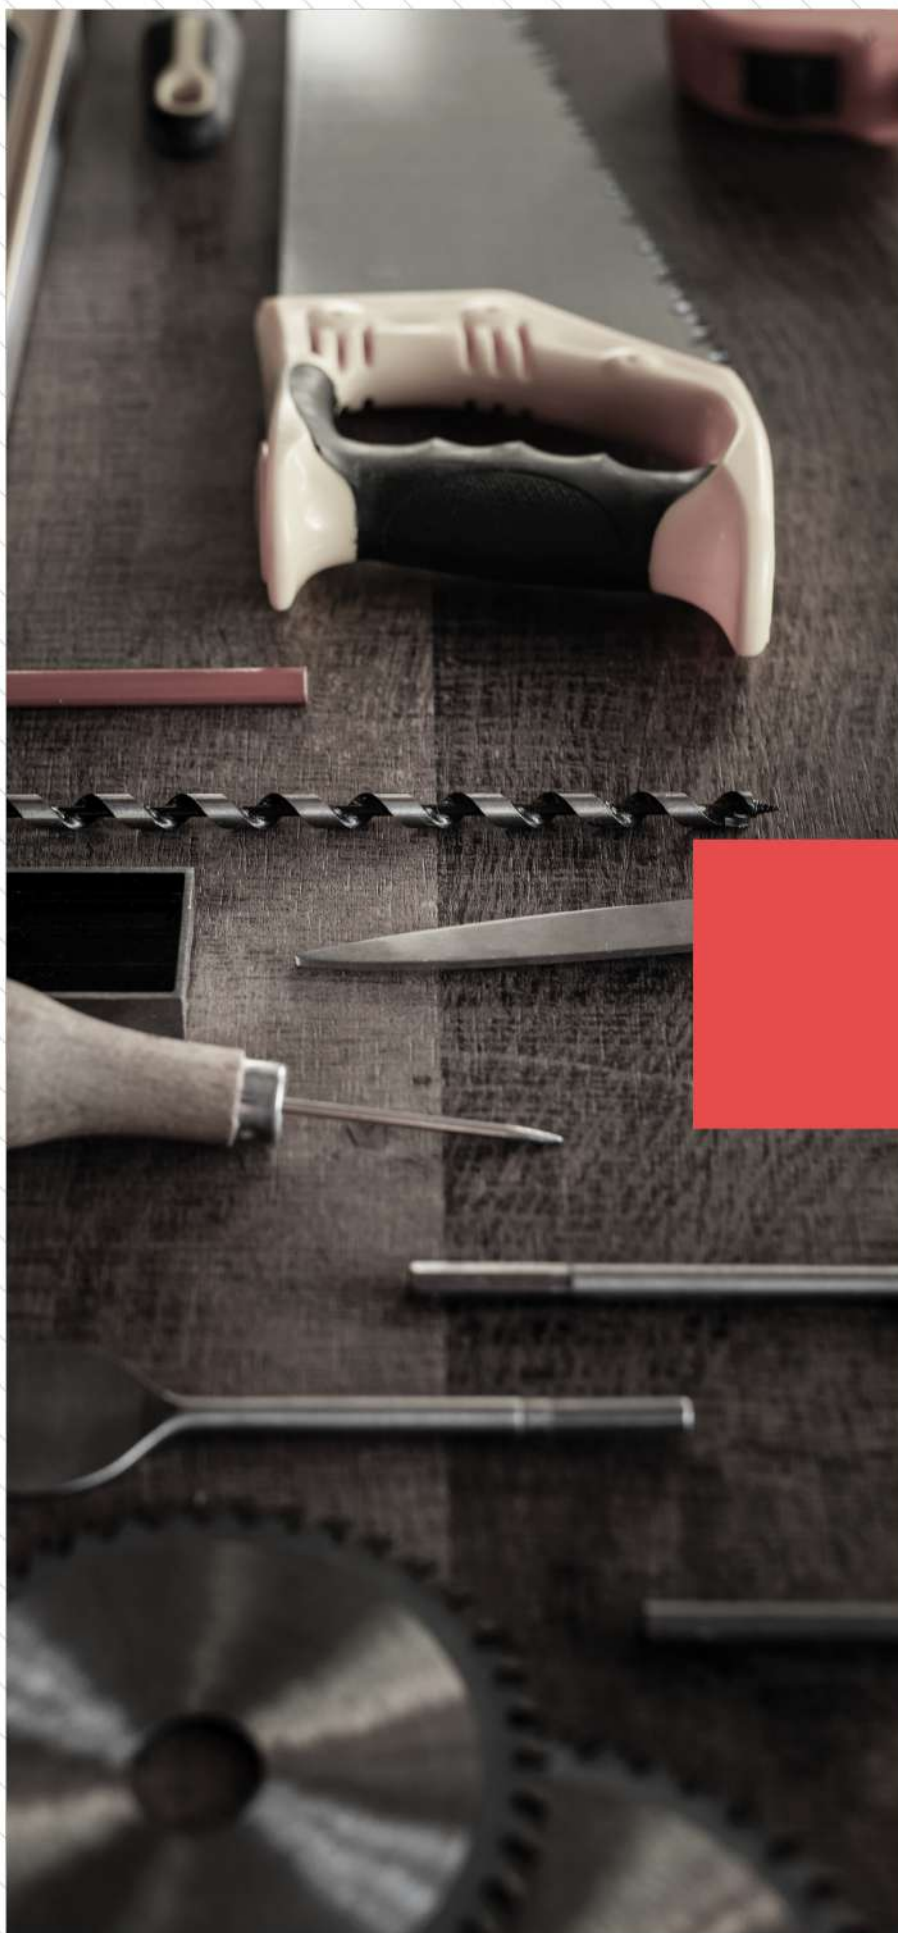

**HAND
TOOLS**




TOOL SET




HOLDING TOOLS



MECHANIC TOOLS

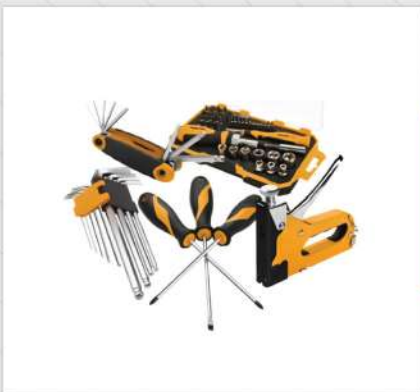

FASTENING TOOLS

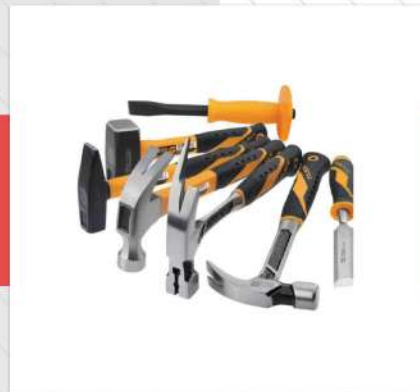

STRIKING TOOLS




CUTTING TOOLS



GARDEN TOOLS



FINISHING TOOLS

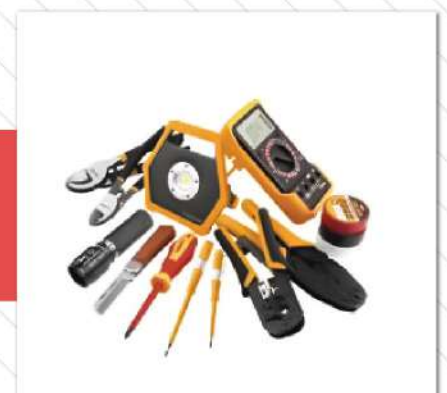

ELECTRICAL TOOLS



INSULATED TOOLS




GARDEN TOOLS



AUTOMOTIVE TOOLS



WELDING TOOLS

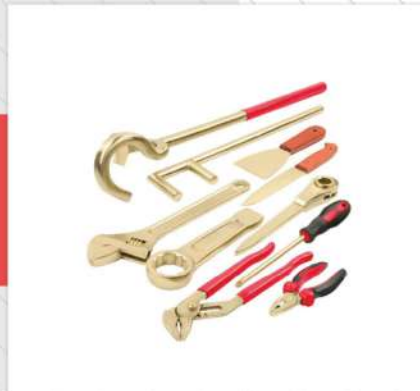


NON SPARKING TOOLS



POWER TOOL



HARDWARE

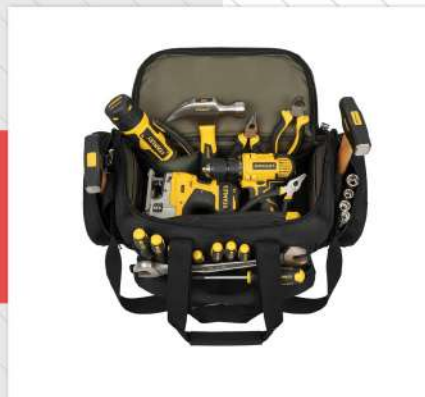

TOOL BAG STORAGE



GENERATORS



PNEUMATIC TOOLS




OTHERS



LADDER

STRAIGHT LADDER Aluminum and Fiber glass

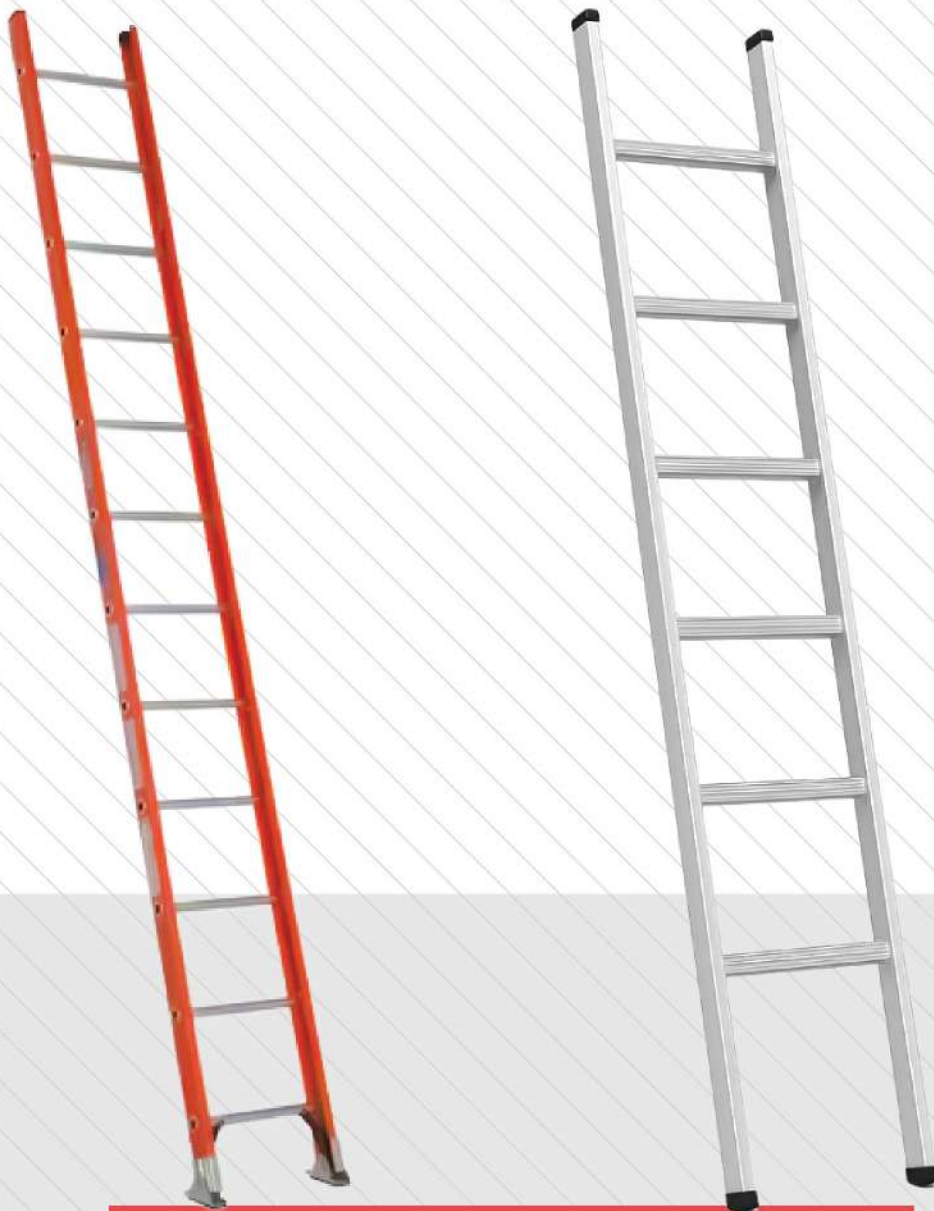

- Overall Ladder Height: Sizes from 1 mtr to 6 mtrs
- Rung/ Step distance: 270mm
- Exclusively designed steps which prevents slipping
- Used for industrial purpose
- Durable, rust proof, maximum strength
- Aluminum: Special alloyed aluminum ladder
- Fiberglass: Rails are non-conductive for working near electricity

A-TYPE LADDER Aluminum and Fiber glass



- Overall Ladder Height: Sizes from 1 mtr to 6 mtrs
- 150kg loading capacity
- Rung/ Step distance: 270mm
- Heavy duty ladder profiles
- Exclusively designed steps which prevents slipping
- Used for industrial purpose
- Durable, rust proof, maximum strength
- Aluminum: Special alloyed aluminum ladder
- Fiberglass: Rails are non-conductive for working near electricity

PODIUM LADDER

Aluminium and Fiber Glass



- Overall Ladder Height: Sizes from 1.8 mtrs to 4.5 mtrs
- 150kg loading capacity
- Wide and comfortable platforms
- Platform Dimension: 400mm x 390mm x 100mm
- Steps/Rung Distance: 270mm
- Handrail height from Platform: 1000mm
- Optional: Wheels for movement

PODIUM LADDER

Aluminium and Fiber Glass



- Special alloyed aluminum ladder
- Special designed steps which prevents slipping
- Can be used for Industrial Purpose
- Safety rail system
- With wheels for easy mobility
- Easy to fold
- Fortified leg support
- Special lock on junction
- Durable, rustproof and maximum endurance

MODEL .NO	ALT/PL401	ALT/PL601	ALT/PL701	ALT/PL801	ALT/PL1201
Closed height (mm)	2515	3075	3355	3635	4755
Base ladder Width (mm)	700	700	700	700	700
Extension ladder Width (mm)	630	630	630	630	630
Bottom apparatus Width (mm)	1400	1400	1400	1400	1400
Rung space (mm)	280	280	280	280	280
Platform height Range (mtr)	1.28 - 1.86	1.55 - 2.55	1.82 - 2.93	2.35 - 3.75	3.45 - 4.70
Platform Size	545x865	545x865	545x865	545x865	545x865
Handrail height From platform (mm)	1150	1150	1150	1150	1150
Major material of construction	AL-6063	AL-6063	AL-6063	AL-6063	AL-6063
Stablizers	Yes	Yes	Yes	Yes	Yes
Wheels for movement	Yes	Yes	Yes	Yes	Yes



PODIUM LADDER Aluminium and Fiber Glass




- Step platform (podium step) with/without handrail
- Different working height options for all types of work
- Easy to assemble/disassemble, transport & storage
- Step distance: 300mm
- Material: Aluminum 6063
- Anti-slip wooden platform: 10mm thick plywood with high quality birch core
- Working height: 3.25m, 3.81m & 4.09m
- Marine grade birch ply platforme



**TEST &
MEASUREMENT**



MANUAL TEST PUMP 60BARS

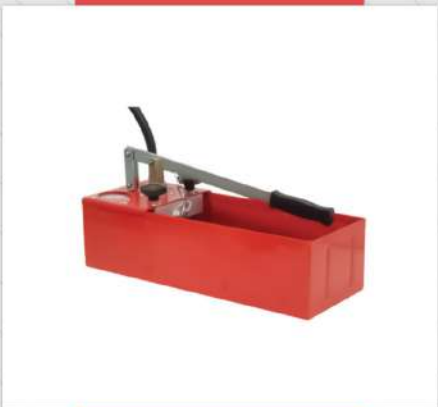

ELECTRIC TEST PUMP 25 BARS



ELECTRIC TEST PUMP 60 BARS



Green Multi-Line Laser

TECHNICAL SPECIFICATIONS

Self-Levelling Range	: $\pm 3^\circ$
Accuracy	: ± 2 mm/10m
Working range without receiver	: 40 m (radius)
Working range with receiver	: 70 m (radius)
Laser Diode / Class	: Green / 2
Operating Time - 1x 360° Line	: 14h/Li-ion
Operating Time - 2x 360° Lines	: 7h/Li-ion
Operating Time - 3x 360° Lines	: 5h/Li-ion
Power Supply	: Li-Ion or Alkaline
	: Alkaline batteries (optional)
Dust/Water Protection	: IP 54
Temperature Range	: -10°C to 45°C
Dimension	: 14 x 13 x 8 cm
Weight (Instrument with Battery)	: 0.85 kg



Distance Meter (100m)

TECHNICAL SPECIFICATIONS

Laser wavelength	: 650nm
Laser class	: Class II
Measuring range	: 0.05m ~ 100m
Distance unit	: m/ft/ inch
Measuring accuracy	: 2mm
Working temperature	: 0°C ~ $+40^\circ\text{C}$
Storage temperature	: -20°C ~ $+70^\circ\text{C}$
Power	: 2*AA battery
Size	: 130 x 54 x 27mm



VOLTAGE DETECTORS



DIGITAL MULTIMETERS



CLAMP METERS



INSULATION TESTERS



EARTH TESTERS



OTHER MEP TOOLS & MACHINERIES


REBAR BENDING MACHINE



MB 26

TECHNICAL SPECIFICATION


Motor Power kW	:	1,5 kW
Weigh (Kg)	:	180
Energy	:	380 V AC
Dimensions	:	70 x 65 x 75
Bending Capacity (mm)	:	26
Control	:	Cable
Housing Material	:	S355 JR Kalite Çelik
Operation Temperature	:	-20 / +45 C
Warranty Period	:	2 Years

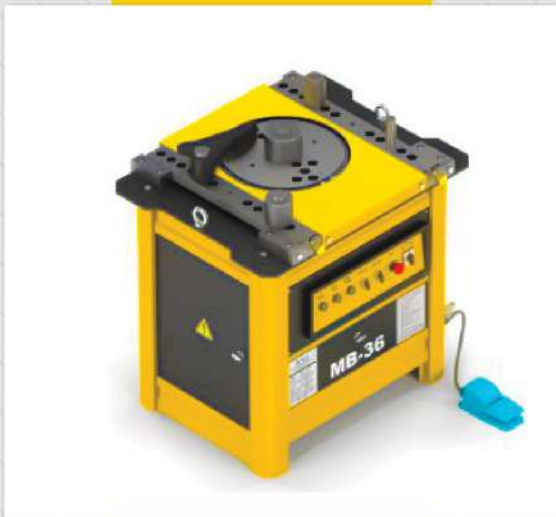

MB 36

TECHNICAL SPECIFICATION

Motor Power kW	:	3 kW
Weigh (Kg)	:	370
Energy	:	380 V AC
Dimensions	:	90 x 75 x 85
Bending Capacity (mm)	:	36
Control	:	Cable
Housing Material	:	S355 JR Kalite Çelik
Operation Temperature	:	-20 / +45 C
Warranty Period	:	2 Years

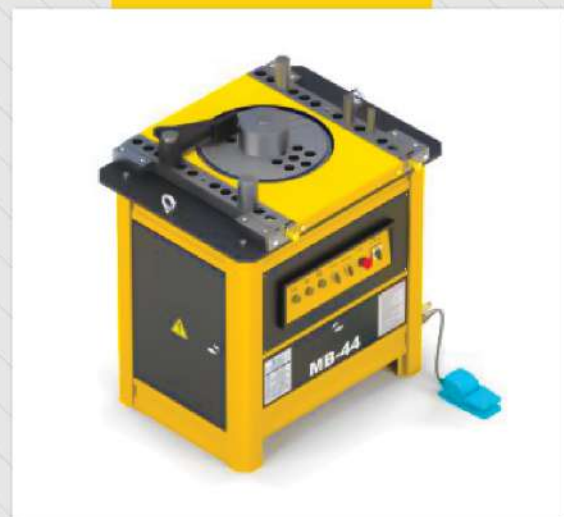

MB 44

TECHNICAL SPECIFICATION

Motor Power kW	:	4 kW
Weigh (Kg)	:	440
Energy	:	380 V AC
Dimensions	:	100 x 80 x 97
Bending Capacity (mm)	:	44
Control	:	Cable
Housing Material	:	S355 JR Kalite Çelik
Operation Temperature	:	-20 / +45 C
Warranty Period	:	2 Years

MAGNETIC DRILLING MACHINE ECO.32

	Metric	Imperial
Annular cutting	Ø 12 - 32 mm	Ø 1/2" - 1 1/4"
Twist drilling	Ø 1 - 13 mm	Ø 1/16" - 1/2"
Countersinking	Ø 10 - 40 mm	Ø 3/8" - 1 9/16"
Length	320 mm	12 5/8"
Width	210 mm	8 1/4"
Height	370 - 512 mm	14 9/16" - 20 3/16"
Stroke	150 mm	5 15/16"
Weight*	11 kg	24.3 lbs
Magnet (l x w x h)	160 x 80 x 42 mm	6 5/16" x 3 1/8" x 1 5/8"
Magnetic force	1,500 kg	3,305 lbs
Motor power	1,000 W	9.1 A
Total power	1,050 W	9.5 A
Speed (no load)	775 rpm	
Speed (load 1,000 W, 9.1 A)	440 rpm	
Spindle (Weldon)	19.05 mm	3/4"
Voltage	110 - 120 V / 60 Hz 220 - 240 V / 50 - 60 Hz	



Power surge protection



Power fluctuation protection



Gyro-Tec



Automatic shut-off



Carbon brush wear indicator



2-way magnet



Magnet LED-indicator

Benefits:

- One-speed gearbox
- Detachable spindle drive and integrated tool cooling and lubrication
- High-precision height adjustment for:
 - Low maintenance
 - Minimal wear correction
- Strong dual coil CNC machined 2-way magnet, causing the machine to use less energy, generate less heat and therefore lasts longer Reduced risk of damaging or hurting machine, tools, workpiece and operator
- Suitable for use in areas and workplaces where power supply is of less quality
- Reduced risk of armature damage
- Reduced risk of control unit(s) damage



MAGNETIC DRILL - ECO.50S



Annular cutters	:	Ø 12-50 mm
Twist drills	:	01-23 mm
Countersink	:	Ø 10 - 55 mm
Length	:	320 mm
Width	:	200 mm
Height	:	445 - 615 mm
Stroke	:	170 mm
Weight	:	11.2 kg
Magnet (lxwxh)	:	160x80x36 mm
Magnetic force	:	1500 kg
Motor power	:	1250 W
Total power	:	1300 W
Speed (no load)	:	315 min-1
	:	690 min-1
Speed (load)	:	235 min-1
	:	425 min-1
	:	(1250 W)
Spindle	:	19,05 mm weldon
Voltage	:	110-120 V AC / 50-60 Hz
	:	220-240 V AC / 50-60 Hz



Features

- High precision slide & rail construction
- Integrated oil bath gearbox
- Morse Taper 3 spindle
- Practical long stroke
- 2-speed gearbox
- Detachable spindle






Rebar Bending & Straightening
Machine 6 - 32mm



Rebar Cutting Machine
6 - 32mm

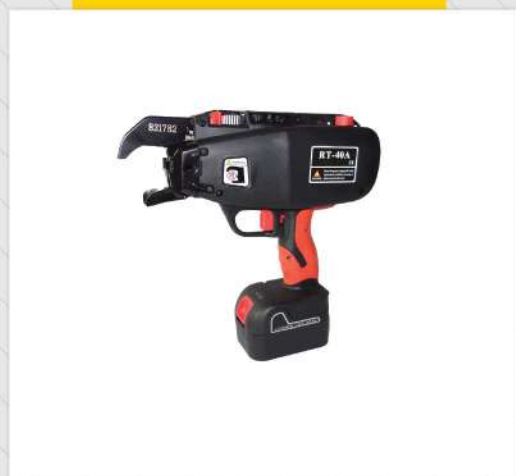

Rebar Tying Machine
up to 40mm



**EMT CONDUIT
BENDER**



**METAL CABLE
PULLING SPRING**

Available Sizes:
15 mtrs 30 mtrs



BENDING SPRINGS

Available Sizes:
20mm 25mm 32mm



FISH TAPE

Length: 100Mtrs



PIPE CUTTER

Sizes: 42mm, 63mm, 75mm

Heavy duty pipe cutter for cutting PE, PB, PP, PVC, PVDF and PPR pipes.

Applicable to the pipe pressure under PN2.5 and diameter less than 75mm



TORQUE WRENCH

Extra heavy duty made from high strength alloy steel and precise heat treatment

Accuracy with a torque tolerance of $\pm 3\%$ Bi-Directional torque; ideal for confined spaces



COMPRESSOR



VENTILATION FAN

24" Ventilation Fan with





CABLE LAYING EQUIPMENTS



CABLE ROLLERS




INDUSTRIAL CABLE PULLING MACHINE



HYDRAULIC CABLE DRUM LIFTING JACK



CABLE DRUM TRAILERS

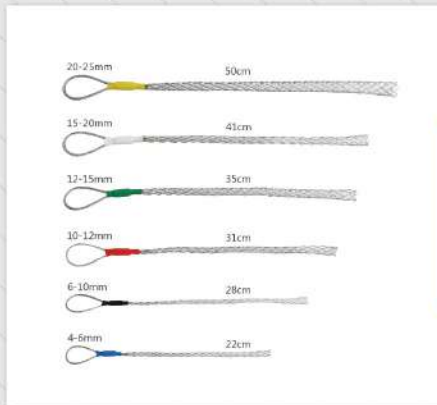

CABLE PULLING GRIPS



SWIVEL LINKS



TRIPLE CORNER ROLLER



DUCT ROD



**MEP
CONSUMABLES**



CABLE TIE



COTTON WASTE




COCO BRUSH



CARGO LASHINGS

HSS DRILL BITS

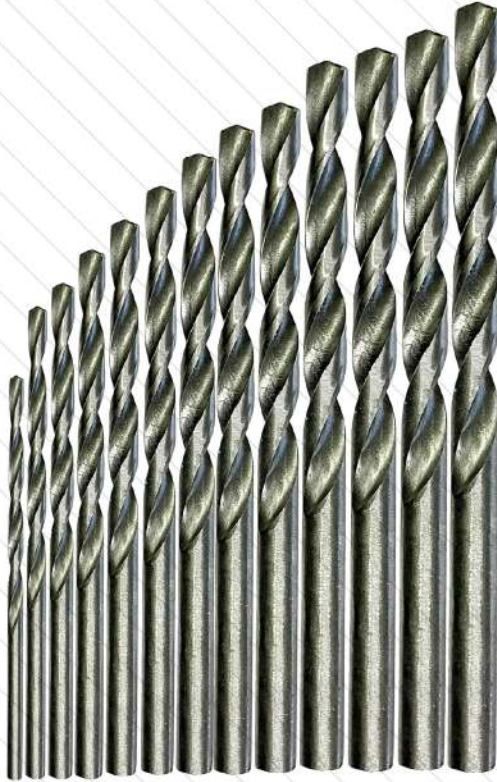

- High Speed Steel Drills to DIN338
- Material: M2 HSS 6542, M35 Cobalt, 9341, 4341, Tin Coated
- Recommended for mild steel and general grades of stainless steel.



SDS DRILL BITS

Type: SDS Plus Cross-tip
2x longer, 2x more carbide in tip
Optimal groove design
Application: Brick, Concrete, Stone

HOLE SAW CUTTERS



- Deep cutting Bi-Metal hole saw cutters
- 8% Cobalt
- Extra deep 1-7/8" (48mm) cutting depth for specialty cuts
- Variable pitch and smooth cutting action with minimum vibration
- Separate arbor required

HAND HACKSAW BLADES



Bimetal 8% Cobalt High Speed
Unbreakable bimetal blade for superb cutting performance
Shatter proof blade for high wear resistance as compared to conventional bimetal blades
Cut through all types of materials including alloys and stainless steels.

BOSS WHITE



- Weight: 400g
- For use with hot and cold water (non-potable duties), natural gas and low-pressure steam.

STEEL STRIP & CLAMP



Steel Strip metal roll is the perfect solution to create clamps of different diameters depending on the user's needs. Strip steel is a long strip clamp available in 9 or 12 mm Band Width. Use the band clamp clip to close the clamp.

Advantages

- Variety
- Flexibility
- Storage and stock advantage
- Provides up to 44 clamps

Application Areas

- Water Industry
- Air Conditioning
- Building
- Plumbing



INSULATION TAPES



MASKING TAPES



TEFLON TAPES



CLEAR TAPE



BROWN TAPE



DUCT TAPE



WRAPING TAPE



ALUMINIUM FOIL TAPE



PERMANENT MARKERS



INDUSTRIAL SOCKET



JUTE



FIRE



AL WATHIQ
TRADING
MEP SUPPLIER

AL WATHIQ
TRADING



PO Box 47051
Building number 1, Zone 91
Street 2100, Warehouse No. B3 - A1 - 23
Doha , Qatar

www.alwathiqtrading.com
admin@alwathiqtrading.com